


### 1.1.1.a Security settings for ActiveX controls and Apeon Xcelerator plug-in download

If the Web application uses any of the following features: call OLE objects, DLL files, runs executable programs on the Client, or the Web application is deployed with Apeon Xcelerator, then when the Web application is run for the first time on the Client the user will need to download an ActiveX control or Apeon Xcelerator plug-in from the Web Server. To ensure that Internet Explorer will not block the download, configure Internet Explorer's settings, using the following steps:

STEP 1 - Open Internet Explorer and select Tools | Internet Options | Security tab.


STEP 2 - Verify that you selected an appropriate Web content zone, as shown in Figure Error! No text of specified style in document.-1.

Figure Error! No text of specified style in document.-1: Select a Web content zone

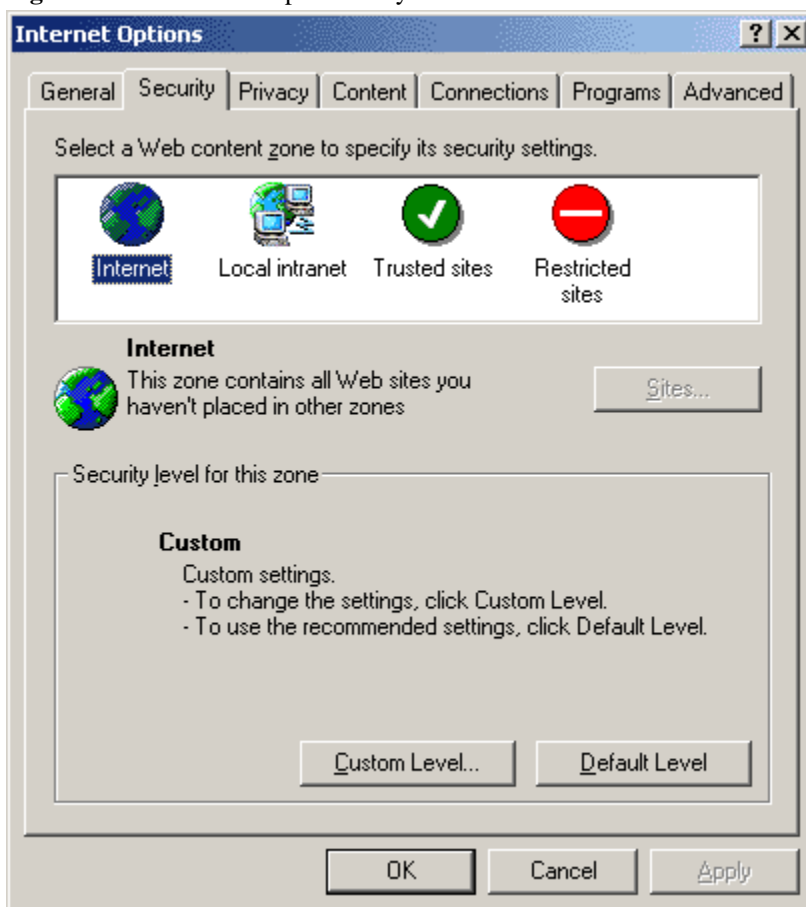

STEP 3 - Click the *Custom Level...* button in the Security tab. The Security Settings page is displayed, as shown in Figure Error! No text of specified style in document.-2.

**Figure Error! No text of specified style in document.-2: Security Settings page**

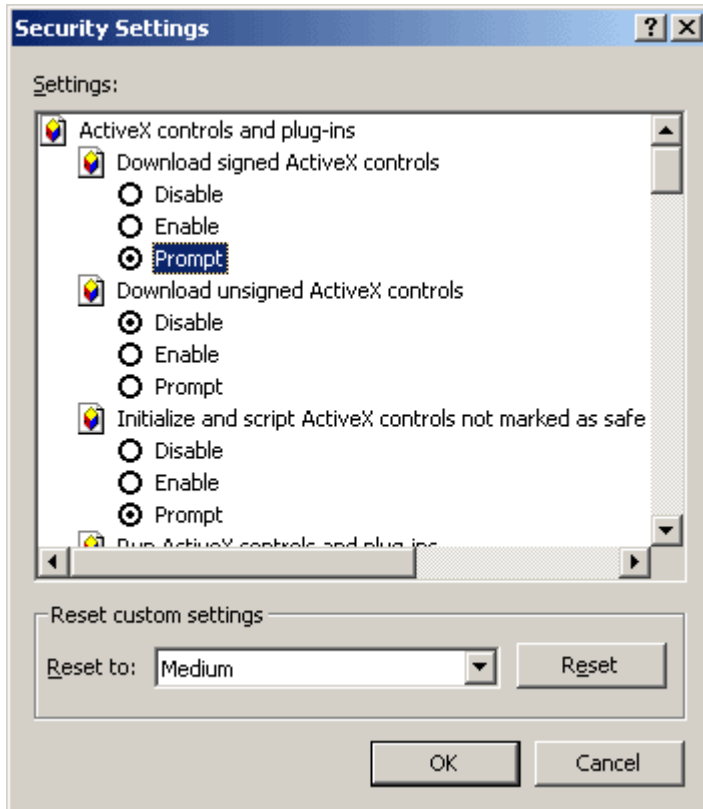

STEP 4 - Check the *Enable* or the *Prompt* (recommended) radio button for the following options:

- Download signed ActiveX controls and plug-ins
- Initialize and script ActiveX controls not marked as safe
- Run ActiveX controls and plug-ins
- Script ActiveX controls marked safe for scripting
- File download

If *Enable* is selected, the ActiveX control will download automatically without prompting. If *Prompt* is selected, your approval will be required before downloading takes place.